

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/029817 A1**

(51) International Patent Classification<sup>7</sup>: **G06F 13/38**

(21) International Application Number:  
PCT/IB2003/002236

(22) International Filing Date: 22 May 2003 (22.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PCT/SG02/00239  
24 September 2002 (24.09.2002) SG

(71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **NG, Chee, Y.** [MY/SG]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **CHANG, Yeow, K.** [SG/SG]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **TJIA, Jerome** [SG/SG]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SHARMA, Kawshol** [IN/SG]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **DUIJVESTIJN, Adrianus, J.**; Philips Intellectual Property & Standards, c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **BUS CONNECTION SYSTEM**

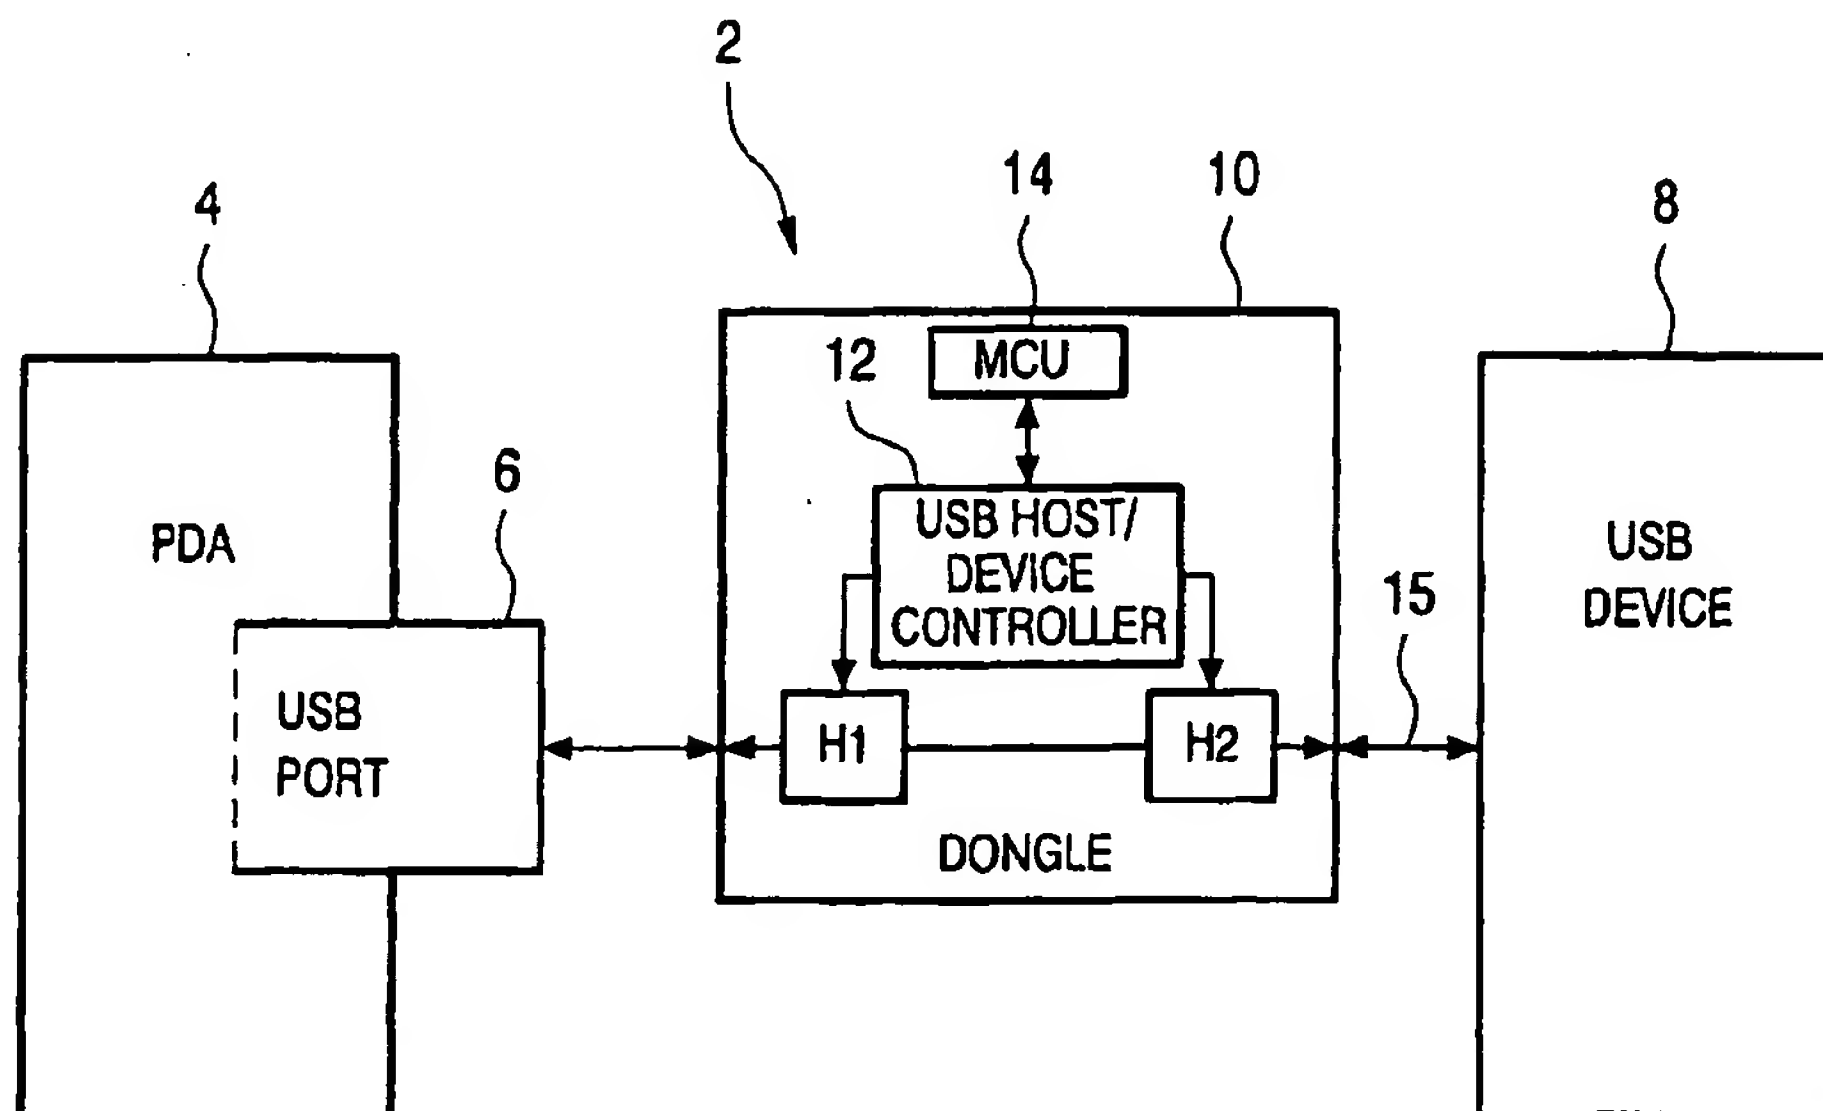

(57) Abstract: A bus station in the form of a hardware dongle, operates in conjunction with a USB Device running suitable software. When the bus station determines that a bus host is connected to a first bus communication port thereof, it acts as a transceiver to allow conventional bus communications between said bus host and a bus device connected to a second bus communication port thereof. When the bus station determines that a bus device running suitable software is connected to the first bus communication port thereof, it acts as an alternate host to allow bus communications between said bus device connected to the first bus communication port and a bus device connected to a second bus communication port.

WO 2004/029817 A1

## Bus connection system

This invention relates to a bus connection system, and in particular to a device which can be used with electronic equipment in a bus communication system to allow the equipment to act as a host within the system.

The Universal Serial Bus (USB) communication system is becoming very  
5 widespread.

In a USB system, it is possible to interconnect many items of electronic equipment, such as personal computers, scanners, mobile phones, printers, etc. In any system, one item of equipment is always designated as the USB host, which controls connections with all of the other items, or USB devices. Personal computers are typically provided with  
10 the hardware and software required to allow them to act as USB hosts, but other items are typically not provided with the required hardware and software, and thus can only act as USB devices.

There are however situations in which it would be useful for an item of equipment to be able to act as a USB host, without requiring major modification of the  
15 equipment.

According to an aspect of the present invention, there is provided a bus station, preferably in the form of a hardware dongle, which can be connected to the bus communication port of a bus communication device, enabling it to act as a bus host. In the preferred embodiments of the invention, the bus station operates in the USB system, although  
20 the invention is also applicable to other bus communication systems.

More specifically, one aspect of the present invention provides a bus station which, when it determines that a bus host is connected to a first bus communication port thereof, acts as a transceiver to allow conventional bus communications between said bus host and a bus device connected to a second bus communication port thereof; and which,  
25 when it determines that a bus device running suitable software is connected to the first bus communication port thereof, acts as an alternate host to allow bus communications between said bus device connected to the first bus communication port and a bus device connected to a second bus communication port.

Fig. 1 is a block schematic diagram of a bus communication system.

Fig. 2 is a block diagram showing the hardware and software in the system of Fig. 1.

5 Fig. 3 is a flow chart showing a method in accordance with an aspect of the present invention.

Fig. 1 is a block schematic diagram of a bus communication system in accordance with the invention.

The system 2 comprises a first USB Device 4 with a USB port 6, a second USB Device 8 and a dongle 10.

In this illustrated embodiment, the first USB Device 4 is a personal digital assistant (PDA), but it will be appreciated that the invention is applicable to any USB Device such as a mobile communications device, digital camera or a personal organizer.

The second USB Device 8 may be any USB Device including a printer, mouse, hard disk or modem.

The dongle 10 comprises an Embedded USB Host/Device Controller 12 with a first host port H1 and a second host port H2, and a low power Micro Controller Unit (MCU) 14.

The first host port H1 of the dongle 10 may be connected, as shown in Fig. 1, to the USB port 6 of the PDA 4. When the first host port H1 of the dongle 10 is connected to the USB port 6 of the PDA 4, the PDA is effectively enabled to act as a USB Host, and the second host port H2 of the dongle 10 then effectively functions as a Host port of the PDA 4. Thus, the PDA 4 may control communications with any USB Device connected to the second host port H2 of the dongle 10 by means of a USB bus 15.

It should be noted that, while the first host port H1 and the second host port H2 are shown here connected to the same USB Host/Device Controller 12, it would be possible for the MCU 14 to communicate with the first host port H1 and the second host port H2 through two independent USB Host/Device Controllers, the first being dedicated to communication with the PDA 4, and the second being dedicated to communication with the connected USB device, or devices, 8.

In order to allow the PDA 4 to act as a USB Host when connected to the dongle 10, the PDA 4 requires a driver update.

The driver update is specific to the particular USB Device which is in use, and serves to add in a Virtual Hardware Abstraction Layer (VirtualHAL) software driver, which runs on top of the existing USB Device Hardware in the PDA 4.

Fig. 2 is a block diagram of the hardware and software in the system of Fig. 1.

5 As is conventional, the USB Device 4 has an operating system 18, a Host Stack 20 and Device Stack and Device Hardware 22. In order to be able to act as a USB Host, the PDA 4 also runs the VirtualHAL driver software 16. When the USB Device 4 is running the VirtualHAL driver software 16, it is sometimes referred to herein as a HostOnDevice.

10 The dongle 10 comprises Host Hardware 12 (that is, the USB host controller), MCU 14 and SoftHost Firmware 24.

The SoftHost protocol layer, which will be described in more detail below, controls the communications between the device 4 and the dongle 10 over the dongle connector 28.

15 Fig. 3 is a flow diagram illustrating the operation of the dongle 10, under the control of the MCU 14. Upon powering up, at step 32 in Fig. 3, the MCU polls the first host port H1 in step 34, to determine whether there is any connection thereto. If there is no connection, the process ends at step 36.

If there is a connection, the MCU determines in step 38 whether there is a  
20 USB Host connected to the first host port H1. If there is a USB Host connected to the first host port H1, then the process passes to step 40, in which the dongle 10 acts as a USB transceiver. That is, it passes communications directly between the first host port H1 and the second host port H2, allowing the connected USB Host to control communications with any USB device (or devices) connected to the second host port H2 in the conventional way.

25 If the MCU determines in step 38 that there is a USB Device, rather than a USB Host, connected to the first host port H1, the process passes to step 41, in which it determines if there is a USB Host connected to the second host port H2. If so, then in step 42 the USB Device core within the USB Host/Device Controller 12 operates to allow conventional USB communications between the USB Device connected to the first host port  
30 H1 and the USB Host connected to the second host port H2.

If there is a USB Device connected to the second host port H2, the MCU 14 enumerates the USB Device connected to the first host port H1 in step 43, and checks if it is a device running VirtualHAL. If the MCU determines in step 43 that the connected device 4 is

not running VirtualHAL, it will disable the device 4 in step 44 and, for example, will trigger a flashing LED, signaling that the connected device 4 does not support VirtualHAL.

If the MCU determines in step 42 that the connected device 4 is running VirtualHAL, (i.e. that it has a VirtualHAL driver 16) the MCU 14 will go into operational mode in step 46, allowing the dongle 10 (together with the device 4) to act as an alternate USB Host. In this mode, which will be described in more detail below, the dongle 10 can control communications with any USB device (or devices) connected to the second host port H2.

In a conventional system, where a personal computer is a USB Host, a Host Stack accesses underlying USB Hardware through the HostHAL. Similarly, in a conventional PDA USB Device, a Device Stack accesses underlying USB hardware through a Device HAL.

However, in accordance with the invention, in the SoftHost system, when the Host Stack (or host station driver software) 20 needs to access the Host Hardware 12, it communicates the access operation details to the VirtualHAL Driver 16. The VirtualHAL Driver 16 wraps these access operation details in a pre-determined SoftHost Protocol. The SoftHost protocol packet is sent out through the existing USB Device Hardware 22 when the SoftHost Dongle 10 polls it for outstanding SoftHost Protocol packets.

Thus, the VirtualHAL Driver software 16 emulates the presence of a host controller towards the host station driver software. That is, from the point of view of the Host Stack 20, communicating with the VirtualHAL Driver 16 is no different from communicating with a HostHAL in a conventional system. The Host Stack 20 will see an actual Host Hardware through the VirtualHAL Driver 16.

Conversely, the VirtualHAL Driver software 16 emulates the presence of a device controller towards the device controller (or device stack) 22. The VirtualHAL Driver software 16 thus translates communications between the host station driver software 20 and the device controller.

The SoftHost Protocol provides the following access functions:

- Reading a register in the dongle Host Hardware 12
- Writing a register in the dongle Host Hardware 12
- 30 - Reading buffer memory in the dongle Host Hardware 12
- Writing buffer memory in the dongle Host Hardware 12

More advanced functions could be added to improve the system performance, for example, a function that reads a register, AND/ORs it with a value and writes the amended value back into the register.



The SoftHost Protocol defines the method by which the Host Stack 20 running on VirtualHAL may access the hardware of the Host Controller 12 using the Device Controller hardware. The SoftHost protocol is described in detail below. In this description, the term "HostDongle" is used to refer to the dongle 10, while the term "HostOnDevice" is used to refer to the device 4, namely an embedded system with USB device hardware 22, running a Host Stack 20 on VirtualHAL 16.

The SoftHost protocol starts at the end of Fig. 3, at the point where the HostDongle 10 has enumerated the connected device 4 and the connected device 4 is confirmed to be a HostOnDevice.

In operational mode, the MCU 14 sets up an interrupt pipe and polls the VirtualHAL driver 16 for data every millisecond. Data sent between the device 4 and dongle 10 is sent by means of the SoftHost protocol, in the form of SoftHost Packets. If the Host Stack 20 on the PDA 4 has sent a hardware access request through the VirtualHAL Driver 16, the VirtualHAL Driver 16 will send the request as a SoftHostPacket when the first host port H1 of the dongle 10 polls it through the interrupt pipe.

The MCU 14 will retrieve this SoftHost Packet from the buffer memory of the embedded USB Host Controller 12 and execute the hardware access accordingly. If there is any data to be returned (read operations), the MCU 14 will send out the corresponding data through Host 1.

## 20 Traffic

The HostDongle 10 and the HostOnDevice 4 communicate using a dedicated bi-directional bulk pipe. There are four types of payloads.

HRU (HostDongle Request Unit)

Sent by HostDongle 10

25 A bulk packet of 8 bytes payload

Used for polling the HostOnDevice 4

May contain Interrupt Information (HRU\_IRQ)

HostDongle 10 ALWAYS sends a bulk-in of 64 bytes after sending the HRU.

HostOnDevice 4 would reply with NOB or CRP through this bulk-in.

30

NOB (No Outstanding Business)

Sent by HostOnDevice 4

A bulk packet of 8 bytes payload

Sent when there are no outstanding transactions

CRP (Common Request Packet)

Sent by HostOnDevice 4

A bulk packet of 16-64 bytes

5 Contains the results of previously received CRP commands, and an optimal data set.

APR (As Per Requested)

Sent by HostDongle 10

10 A bulk packet of 16-64 bytes

### The Flow

As in all USB systems, transfers start with an action by the Host. In the case of the SoftHost protocol, the SoftHost Dongle 10 is always the Host. All SoftHost transfer  
15 cycles starts with a HRU, as defined above. The current transfer cycle must be completed before the HostDongle 10 starts the next transfer cycle.

### Poll-Nothing Cycle: HRU-NOB

HostDongle 10 polls the HostOnDevice 4 for outstanding command sets. If there are no outstanding command sets, HostOnDevice 4 replies with NOB.

20

### Transactions:

HostDongle 10 sends BULK-OUT

HostDongle 10 sends DATA (HRU)

HostOnDevice 4 sends ACK

25

HostDongle 10 sends BULK-IN

HostOnDevice 4 sends DATA (NOB)

HostDongle 10 sends ACK

### 30 Poll-Something Cycle: HRU-CRP-APR

HostDongle 10 polls the HostOnDevice 4 for outstanding command sets.

HostOnDevice 4 sends outstanding command set by CRP. HostDongle 10 executes the command and returns the results by APR.

## Transactions:

HostDongle 10 sends BULK-OUT

HostDongle 10 sends DATA (HRU)

HostOnDevice 4 sends ACK

5

HostDongle 10 sends BULK-IN

HostOnDevice 4 sends DATA (CRP)

HostDongle 10 sends ACK

10

HostDongle 10 sends BULK-OUT

HostDongle 10 sends DATA (APR)

HostOnDevice 4 sends ACK

## Interrupt Cycle: HRU\_IRQ-CRP-APR

- 15 HostDongle 10 alerts the HostOnDevice 4 on outstanding hardware interrupts.  
HostOnDevice 4 decides on the appropriate command sets and sends them by CRP.  
HostDongle 10 executes the commands and returns the results by APR.  
HostOnDevice 4 MUST clear the outstanding interrupt or disable the generation of  
HRU\_IRQ, or the HostDongle 10 would send HRU\_IRQ continuously.

20

## Transactions:

HostDongle 10 sends BULK-OUT

HostDongle 10 sends DATA (HRU\_IRQ)

HostOnDevice 4 sends ACK

25

HostDongle 10 sends BULK-IN

HostOnDevice 4 sends DATA (CRP)

HostDongle 10 sends ACK

30

HostDongle 10 sends BULK-OUT

HostDongle 10 sends DATA (APR)

HostOnDevice 4 sends ACK



**Packet Formats****HRU Format**

The HRU contains the following information:

Current Frame Number

5 HcInterruptStatus of Host Controller 12 in HostDongle 10

Interrupt Status of Device Controller 22

**NOB Format**

No special information required

10

**CRP and APR Format**

Active bit in Header is 1 for CRP, and 0 for APR.

CRP can be of a size of 16-64 bytes. The total size is made up of

A number of command sets (8 bytes each)

15 An optional data set.

Maximum number of command sets in a CRP is 8.

Maximum size of data set is 64-(8\* number of command sets).

20 The multiple command sets in a single command request packet allows a sequence of hardware accesses to be communicated in a single packet and thus reduces the latency transfer.

**Command Set Format**

25 Command Set is an 8-byte data structure. It contains the following information:

Command Set Header (1 byte)

Command Set Index (2 bytes)

Command Set Data (4 bytes)

Command Set Aux (1 byte)

30

Bit	7	6	5	4	3	2	1	0
<b>Group</b>	Active	Remaining Sets			OpCode			
<b>Attribute</b>	Boolean	0-7.0 means last set			0-15			

OpCode	Operation by MCU
0	Write [Aux] bytes from [Data] into [Index] register
1	Read [Aux] bytes from [Index] register into [Data]
2	Write [Data] bytes from DataSet into address location [Index]
3	Read [Data] bytes into DataSet from address location [Index]
4	Read [Aux] bytes from [Index] register, OR with [Data] and write back into [Index] register
5	Read [Aux] bytes from [Index] register, AND with [Data] and write back into [Index] register
6	Set polling rate to [Index]
7	Set HRU_IRQ On/Off
8-15	Reserved. No Action by MCU

The Virtual Hardware Abstraction Layer (VirtualHAL) therefore provides complete access to the target hardware on the connected dongle, using the USB Device hardware. In other words, the existing USB Device hardware is used as an asynchronous microprocessor interface bus to allow the USB Host Driver to access the target hardware.

The use of VirtualHAL provides the advantages that the hardware dongle does not need to handle USB software, which allows the dongle to be low cost, and the Host software can be handled by the embedded system on the USB Device.

Therefore, in the preferred embodiments of the invention, there is provided a hardware dongle that allows a USB Device to attain the capability of USB Host without changes to the existing hardware. In order to achieve this, the USB Device runs emulation software that can be handled by the embedded system on the USB Device. This provides the advantages that the hardware dongle does not need to handle USB software, which allows the dongle to be low cost.

The invention has been described up to this point with reference to a system in which the VirtualHAL driver software allows the USB Device to function as a USB Host in conjunction with the dongle 10. However, similarly structured VirtualHAL driver software could be used to add in multiple interface/functions to a system with USB Device capability. For example, the driver software could allow the USB Device to communicate over Bluetooth, IrDA, USB-OTG, or other communications protocols.

## CLAIMS:

1. A bus station for use in a bus communication system, comprising a first communication port and a second communication port, being arranged to operate in a first mode upon detection of the presence of a host station coupled to said second port and to operate in a second mode upon detection of the absence of a host station coupled to said second port, said bus station being arranged in said first mode of operation to pass communication between said host station coupled to said second port and a device station coupled to said first port, said bus station further being arranged to operate as an alternate host station in said second mode of operation, by communicating with said device station coupled to said first port according to a communication protocol whereby said bus station initiates communications.
2. A bus station according to claim 1 wherein said bus station is arranged to operate as a USB transceiver in said first mode of operation and to operate as a USB host in said second mode of operation.
3. A bus station according to claim 1 wherein said bus station further comprises transceiver circuitry coupled to said first and second port for passing communication between said host station coupled to said second port and said device station in said first mode of operation.
4. A bus station for use in a bus system, comprising a device controller coupled to a communication port, being arranged to operate as a device station, said bus station further being arranged to operate under control of system software, comprising an operating system and host station driver software being arranged to communicate with a host controller and to pass information to and from the operating system, wherein said system software further comprises host emulation software being arranged to emulate the presence of a host controller towards the host station driver software and the presence of device station driver software towards the device controller, further being arranged to translate communications from the host station driver software to the device controller and vice versa.

5. A bus communication system comprising a first bus station comprising a device communication port on a second bus station, said second bus station further comprising a second communication port, said second bus station being arranged to operate in a first mode upon detection of the presence of a host station coupled to said second port and to operate in a second mode upon detection of the absence of a host station coupled to said second port.

6. A bus communication system according to claim 5, wherein said first station comprises a device controller coupled to said device communication port and being arranged to operate under control of system software, comprising an operating system and host station driver software being arranged to communicate with a host controller and to pass information to and from the operating system, wherein said system software further comprises host emulation software being arranged to emulate the presence of a host controller towards the host station driver software and the presence of device station driver software towards the device controller, further being arranged to translate communications from the host station driver software to the device controller and vice versa.

1/2

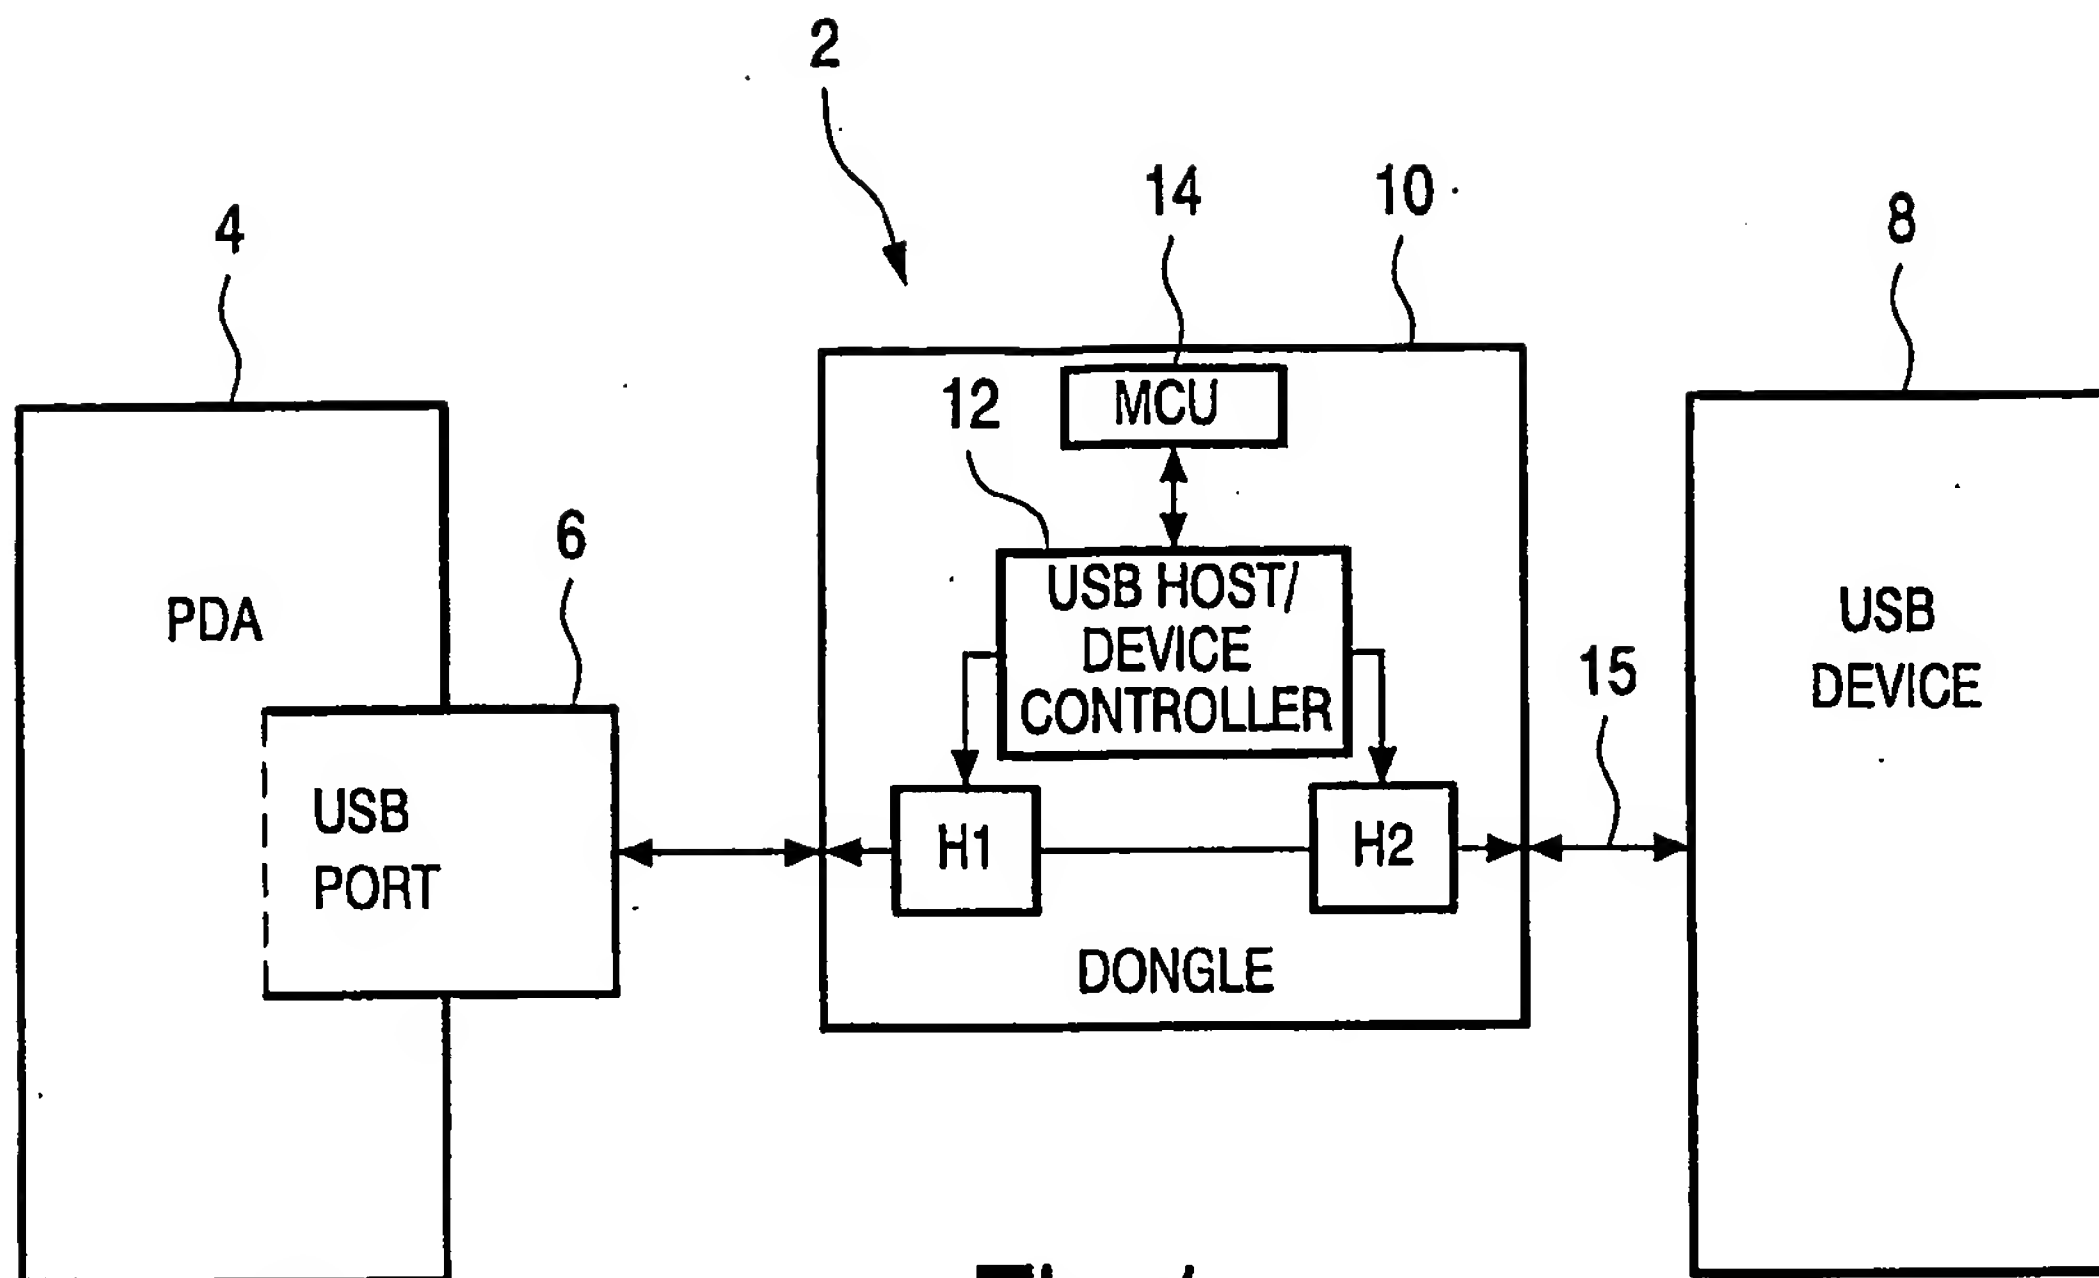


Fig.1

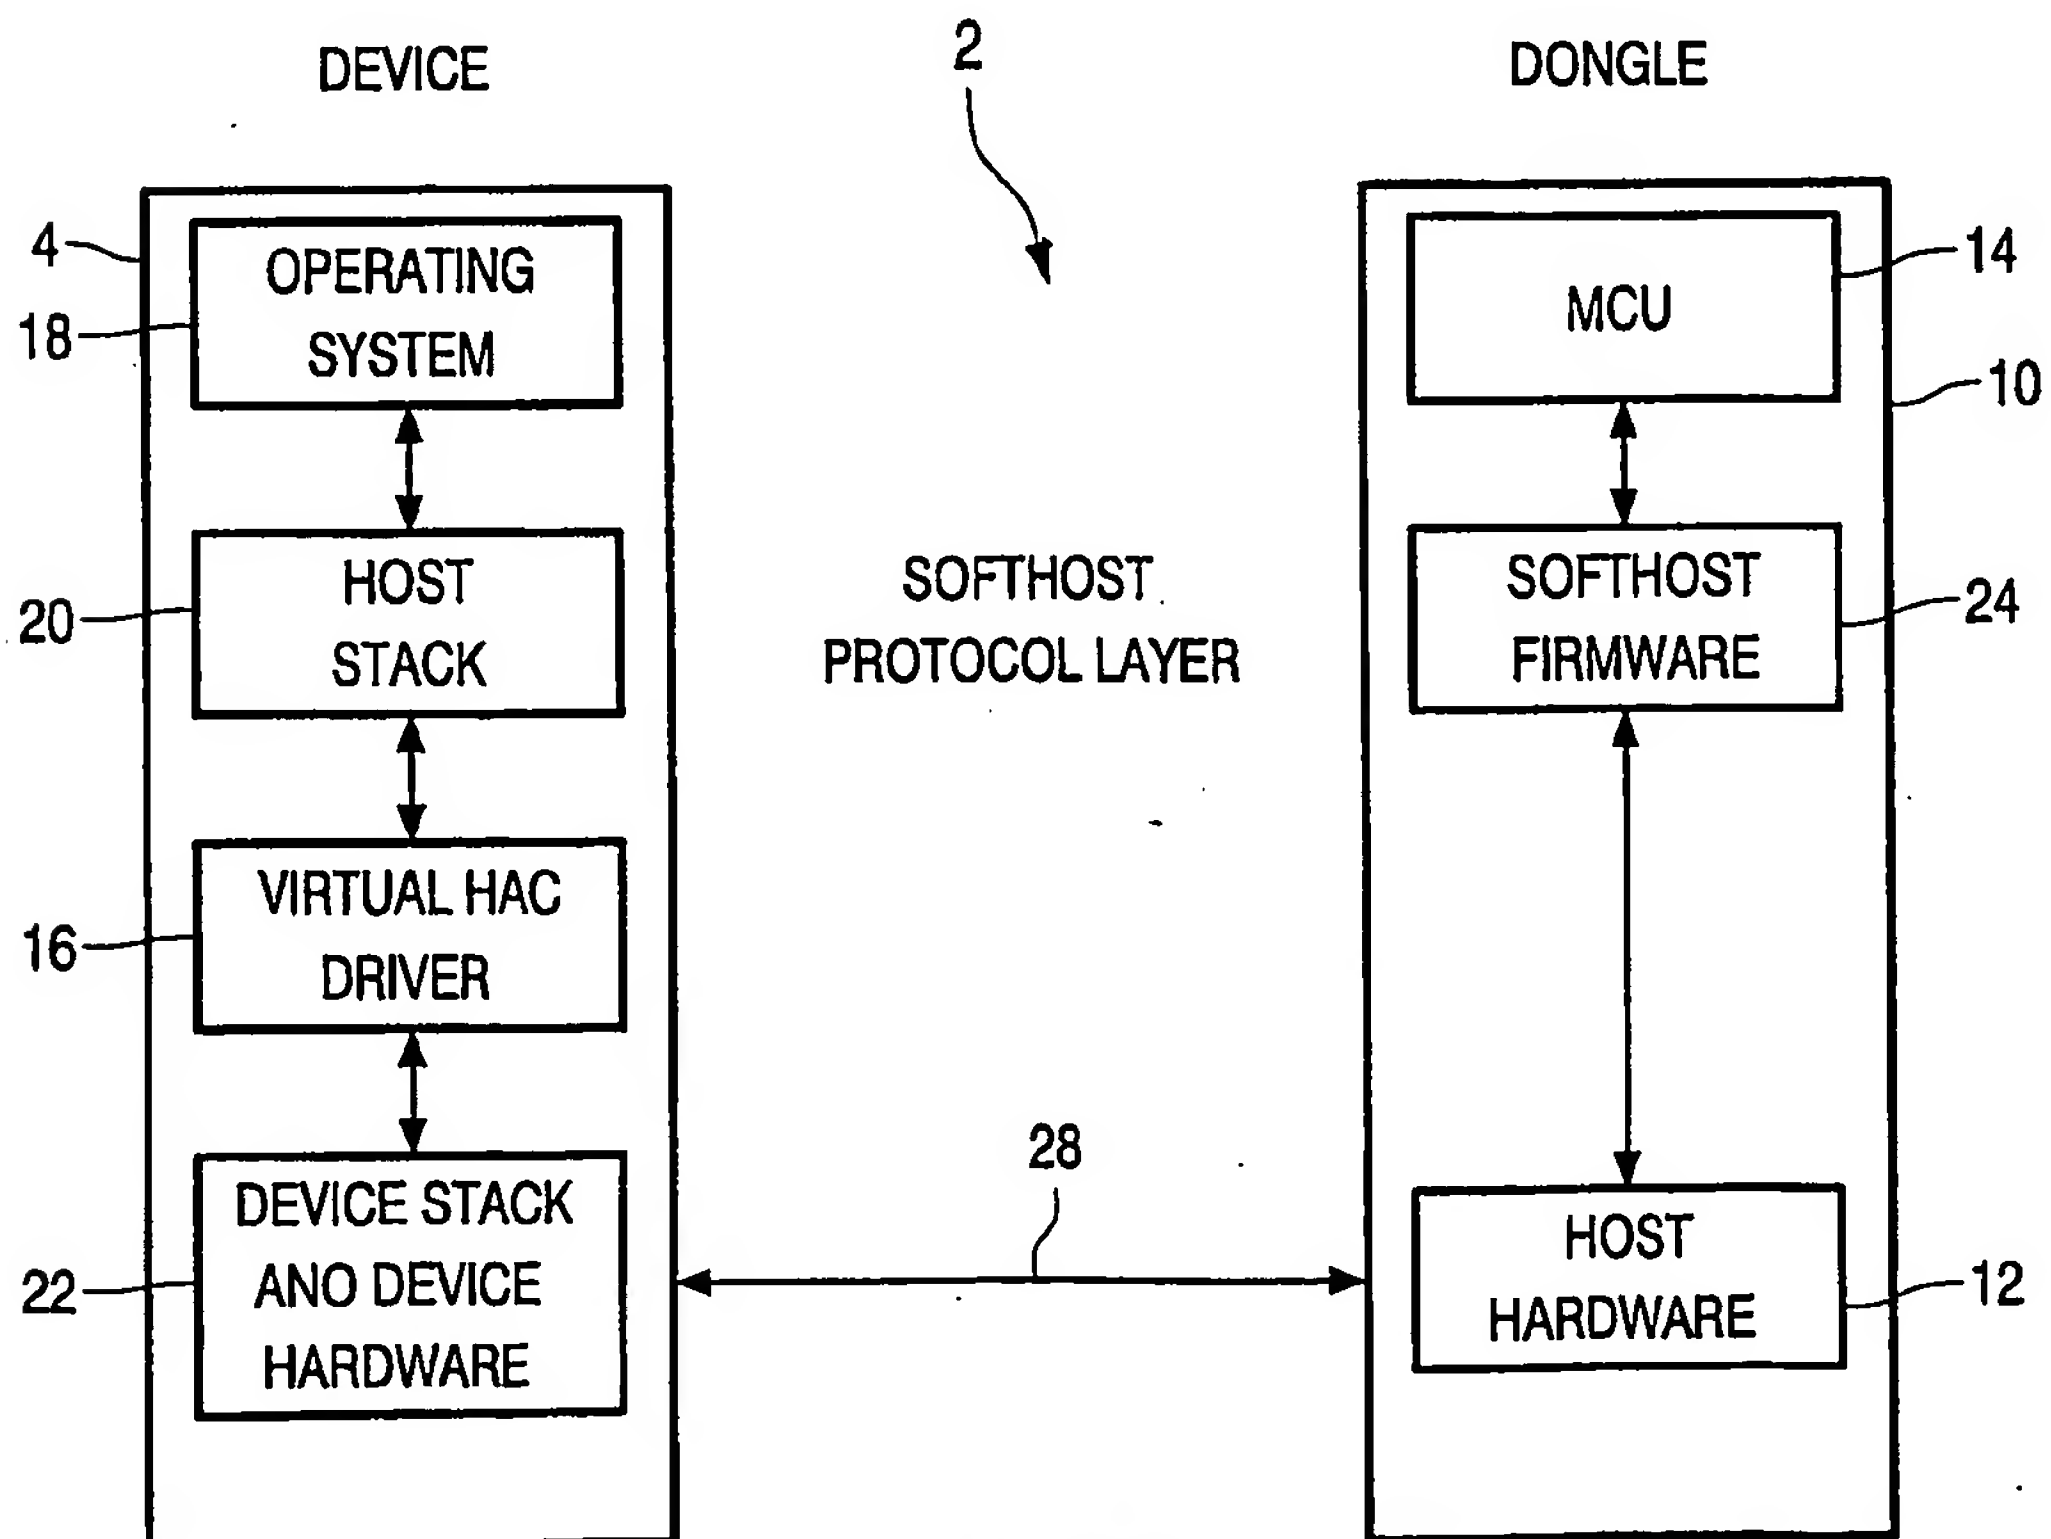


Fig.2

2/2

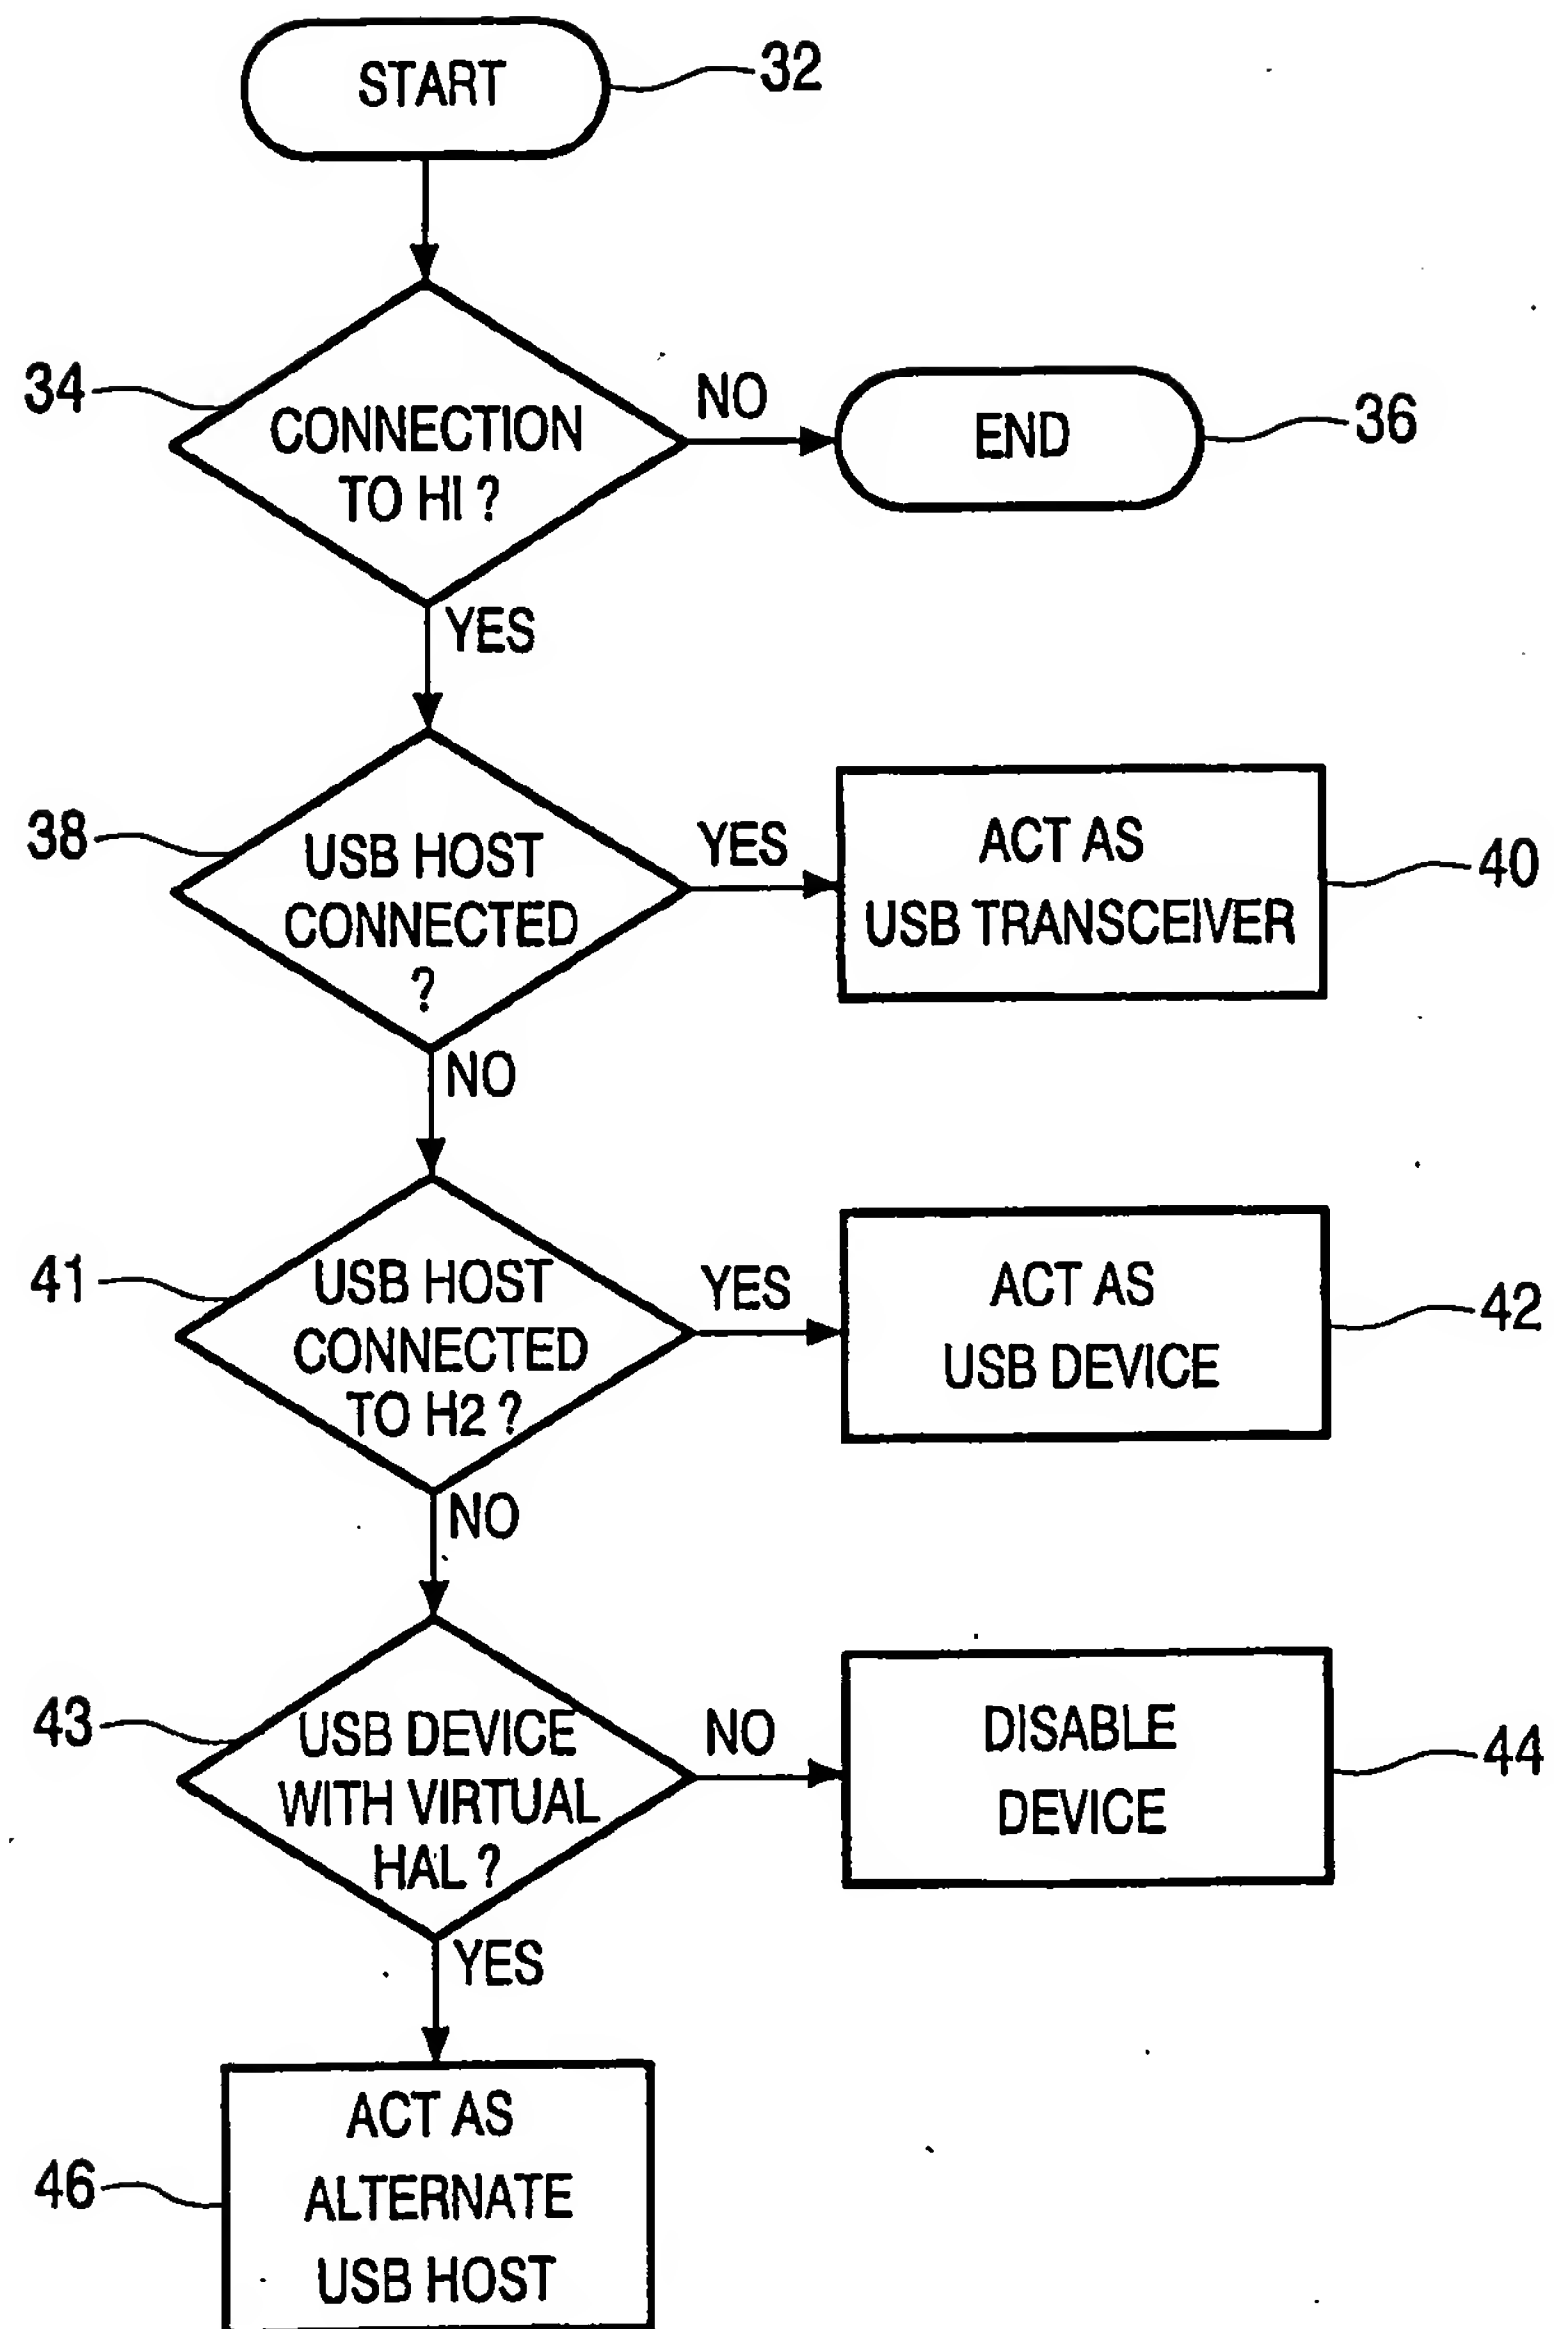


Fig.3



## INTERNATIONAL SEARCH REPORT

PCT/IB 03/02236

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G06F13/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, COMPENDEX, EMBASE, INSPEC, IBM-TDB, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 784 581 A (HANNAH ERIC C) 21 July 1998 (1998-07-21) abstract column 1, line 65 - column 2, line 24 column 4, line 11 - line 63; figure 2A	1-4
X		5,6
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 10, 17 November 2000 (2000-11-17) & JP 2000 196986 A (OLYMPUS OPTICAL CO LTD), 14 July 2000 (2000-07-14)	1-4
X	abstract	5,6
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

29 September 2003

Date of mailing of the international search report

21/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Albert, J

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/02236

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 14, 5 March 2001 (2001-03-05) & JP 2000 316006 A (NEC CORP), 14 November 2000 (2000-11-14) abstract	1-4
X	-----	5,6

# INTERNATIONAL SEARCH REPORT

PCT/IB 03/02236

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5784581	A	21-07-1998	NONE		
JP 2000196986	A	14-07-2000	US	6549958 B1	15-04-2003
JP 2000316006	A	14-11-2000	US	6516205 B1	04-02-2003